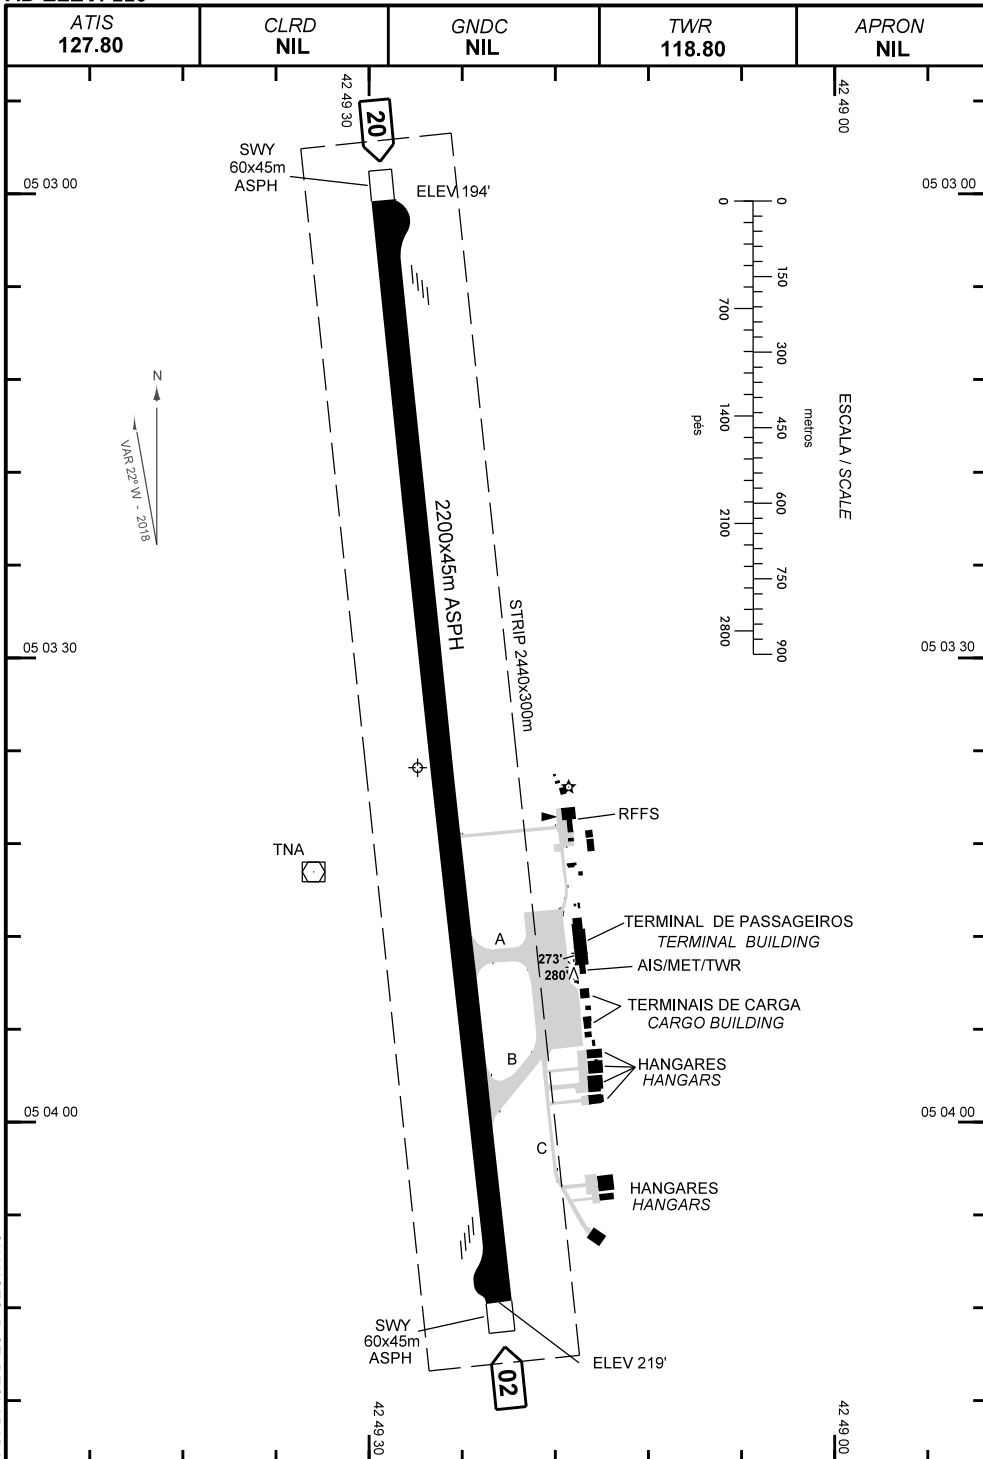




AD ELEV: 220'

ARP S05 03 38 W042 49 28



CHANGES: DIST. DECLARADA.

ADC-SBTE: INFORMAÇÕES COMPLEMENTARES/COMPLEMENTARY INFORMATION

CARACTERÍSTICAS FÍSICAS / PHYSICAL CHARACTERISTICS													
PISTA RUNWAY				DIMENSÕES(m) DIMENSIONS(m)					PCN	TIPO DE SUPERFÍCIE SURFACE KIND			
RWY	BRG MAG	Tipo	RCD	RWY	SWY	CWY	STRIP	RESA	RWY	RWY	SWY		
a	b	c	d	e	f	g	h	i	i	k	l		
<b>02</b>	016	NPA	4	2200X45	60X45		2440		46/F/A/X/T	ASPH	ASPH		
<b>20</b>	196	NPA	4		60X45		300						
DISTÂNCIAS DECLARADAS, AUXÍLIOS VISUAIS E COORDENADAS DAS CABECEIRAS DECLARED DISTANCES, VISUAL AIDS AND THRESHOLD COORDINATES													
RWY	TORA(m)	TODA(m)	ASDA(m)	LDA(m)	AUXÍLIOS AIDS	ALTURA GEOIDAL(m) ALTURA GEOIDAL(m)	COORDENADAS COORDINATES						
<b>02</b>	2200	2200	2200	2200	PAPI	- 21,29	S05 04 12 W042 49 22						
<b>20</b>	2110	2200	2110	2110	PAPI							S05 03 00 W042 49 29	
SERVIÇO DE SALVAMENTO E CONTRAINCÊNDIO / RESCUE AND FIRE FIGHTING SERVICE: RFFS REQ - 7													
RWY 02 / 20													
<p>Sinalização horizontal / Marking Aids</p>  <p>Auxílios luminosos / Lighting Aids</p> 													
<p><b>RMK:</b></p> <ol style="list-style-type: none"> <li>1) PAPI RWY 02 - MEHT 73'</li> <li>2) PAPI RWY 20 - MEHT 61'</li> <li>3) GROOVED : RWY 02/20</li> <li>4) RWY 02/20 AUTH giro 180 DEG para ACFT com envergadura superior a 15M somente nas THR.</li> <li>4) RWY 02/20 AUTH twirl 180 DEG ACFT with wingspan greater than 15M only in THR.</li> <li>5) RWY 02 e 20 com provimento de RESA.</li> <li>5) RWY 02 and 20 with RESA provision.</li> </ol>													