


AD ELEV: 220'

ARP S05 03 38 W042 49 28

ATIS 127.80	CLRD NIL	GNDC NIL	TWR 118.80	APRON NIL
----------------	-------------	-------------	---------------	--------------

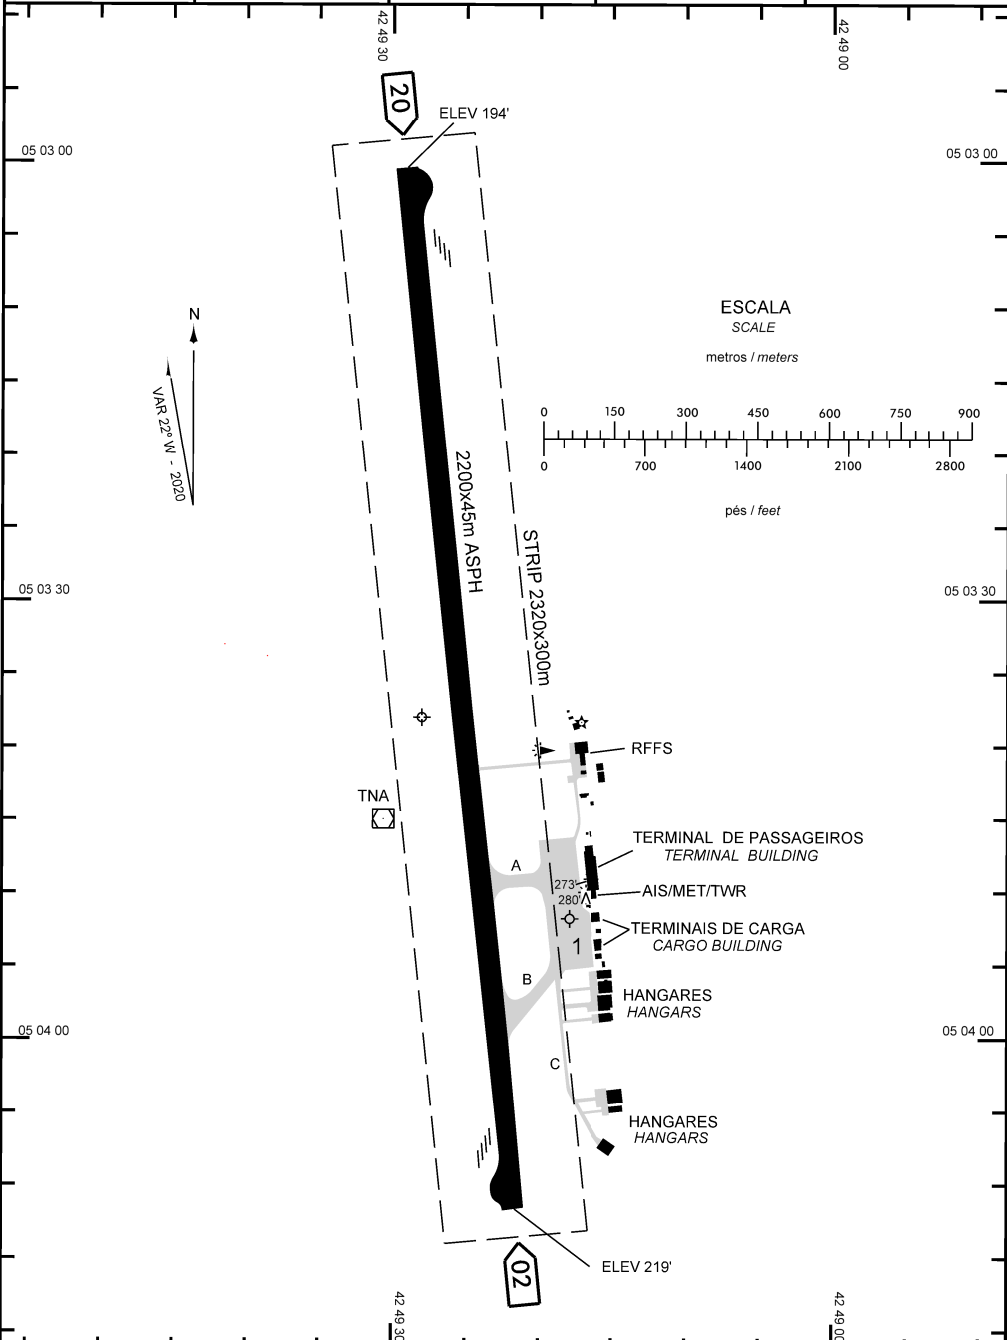

CHANGES, DECVAR, DIST, DECLARADA, STRIP, RCD.

ADC - SBTE: INFORMAÇÕES COMPLEMENTARES / COMPLEMENTARY INFORMATION


CARACTERÍSTICAS FÍSICAS / PHYSICAL CHARACTERISTICS											
PISTA RUNWAY				DIMENSÕES(m) DIMENSIONS(m)				PCN	TIPO DE SUPERFÍCIE SURFACE KIND		
RWY	BRG MAG	Tipo Type	RCD	RWY	SWY	CWY	STRIP	RWY	RWY	SWY	
a	b	c	d	e	f	g	h	i	j	k	
02	016	NPA	4C	2200x45			2320 x 300	46/F/A/X/T	ASPH		
20	196	NPA	4C								

DISTÂNCIAS DECLARADAS, AUXÍLIOS VISUAIS E COORDENADAS DAS CABECEIRAS DECLARED DISTANCES, VISUAL AIDS AND THRESHOLD COORDINATES							
RWY	TORA(m)	TODA(m)	ASDA(m)	LDA(m)	AUXÍLIOS / AIDS	ALTURA GEOIDAL(m) GEOID HEIGHT(m)	COORDENADAS COORDINATES
02	2200	2200	2200	2200	PAPI	-21,29	S05 04 12 W042 49 22
20	2200	2200	2200	2200	PAPI		S05 03 00 W042 49 29


SERVIÇO DE SALVAMENTO E CONTRAINCÊNDIO / RESCUE AND FIRE FIGHTING SERVICE: RFFS REQ - 07

RWY 02 / 20

Sinalização horizontal / Marking Aids



Auxílios luminosos / Lighting Aids



- RMK:**
- 1) PAPI RWY 02 - MEHT 73'
 - 2) PAPI RWY 20 - MEHT 61'
 - 3) GROOVED : RWY 02/20
 - 4) RWY 02/20 AUTH giro 180 DEG para ACFT com envergadura superior a 15M somente nas THR.
 - 4) RWY 02/20 AUTH *twirl* 180 DEG ACFT with wingspan greater than 15M only in THR.

CHANGES: DECVAR, DIST, DECLARADA, STRIP, RCD.