

INSTRUMENT APPROACH
CHART (IAC)

ANÁPOLIS / Base Aérea, MIL (SBAN)

AD ELEV: 3732'



VOR Z RWY 06L

ATIS NIL	APP ANÁPOLIS 119.15 120.55 129.45 133.00 121.50			TWR ANÁPOLIS 118.30 121.25 121.50	GNDC ANÁPOLIS 121.90
VOR APO 116.80 MHz	FINAL CRS 060°	FAF: 5730'	N/A		VOR MDA / (OCH): 4110' / (380')

APCH Perdida: Subir para **7000'**. Manter a RDL **060** do VOR APO até **6000'**. Curvar à ESQUERDA direto VOR APO para espera.

Missed APCH: Climb to **7000'**. Maintain **060** RDL APO VOR up to **6000'**. Turn LEFT direct APO VOR for holding.

RMK: NIL.

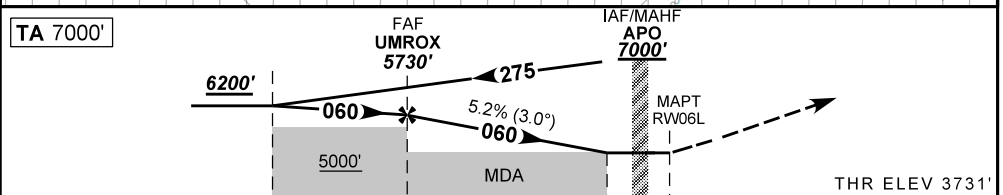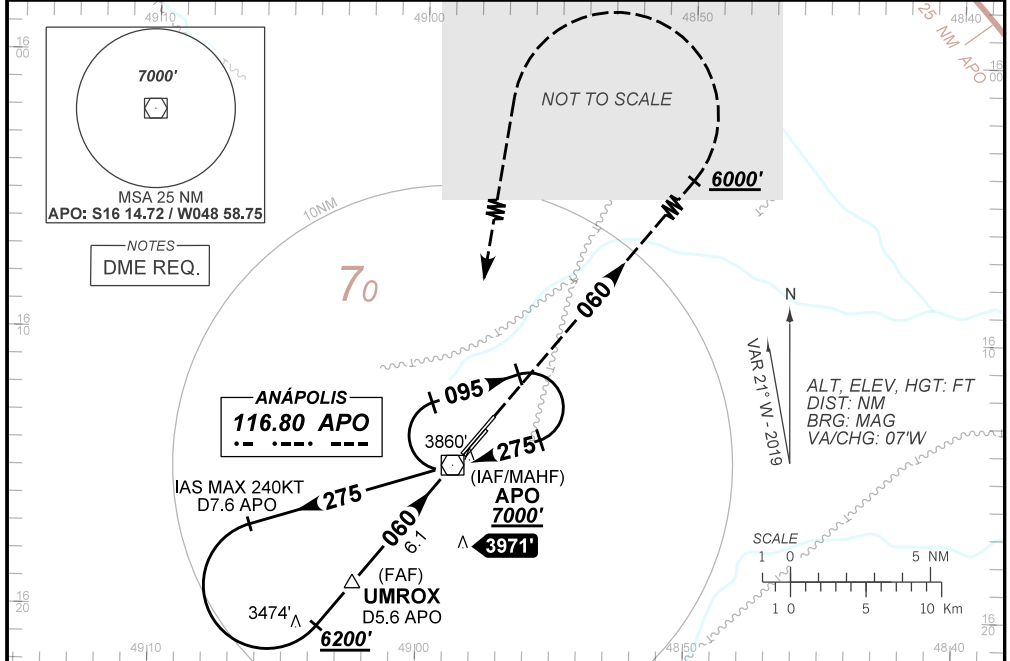

TO THR 06L (NM)	8.1	6.1	1.0	0.0
TO APO (DME)	7.6	5.6	0.5	0.5

UMROX	5.0	4.0	3.0	2.0	1.0	RW06L	KT	090	110	130	150	170	190
5730	5373	5055	4736	4418	4110	ALT	FPM	500	600	700	800	900	1000
1999	1642	1324	1005	687	380	(HGT)	FAF-MAPT	NA					

STRAIGHT-IN	CAT	A	B	C	D	E
	MDA / (OCH)	4110' / (380')				
VOR	ALS/NO ALS/ RVR ALS (m)	NIL / 1600 / NIL		NIL / 1700 / NIL		
CIRCLING	MDA / (OCH)	NA				
	VIS (m)					

CHANGES: ADEL, IDENT, LAYOUT, MDA, MSA, PROC, VAR.