

INSTRUMENT APPROACH
CHART (IAC)

SÃO GABRIEL DA CACHOEIRA / São Gabriel da Cachoeira (SBUA)

RNAV (GNSS) RWY 23

AD ELEV: 251'



ATIS NIL	APP NIL	AFIS GABRIEL 125.70		GNDC NIL
N/A	FINAL CRS 234°	FAF 1890'	LNAV/VNAV DA / (OCH): 613' (370')	LNAV MDA / (OCH): 680' (440')

APCH Perdida: Subir para **4000'** Manter rumo ~~234~~ até cruzar **2000'**. Curvar à DIREITA direto UA011 para espera.

Missed APCH: Climb to **4000'** Maintain course ~~234~~ until passing **2000'**. Turn RIGHT direct to UA011 for holding.

RMK: 1) Para sistemas não compensados Baro-VNAV, LNAV/VNAV NÃO AUTORIZADO abaixo de 0°C ou acima de 50°C.

RMK: 1) For uncompensated systems Baro-VNAV, LNAV/VNAV NOT AUTHORIZED below 0°C or above 50°C.

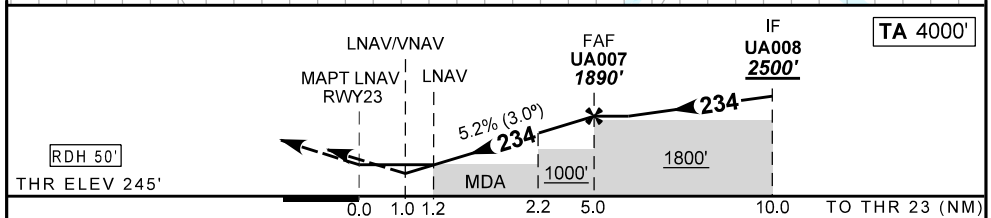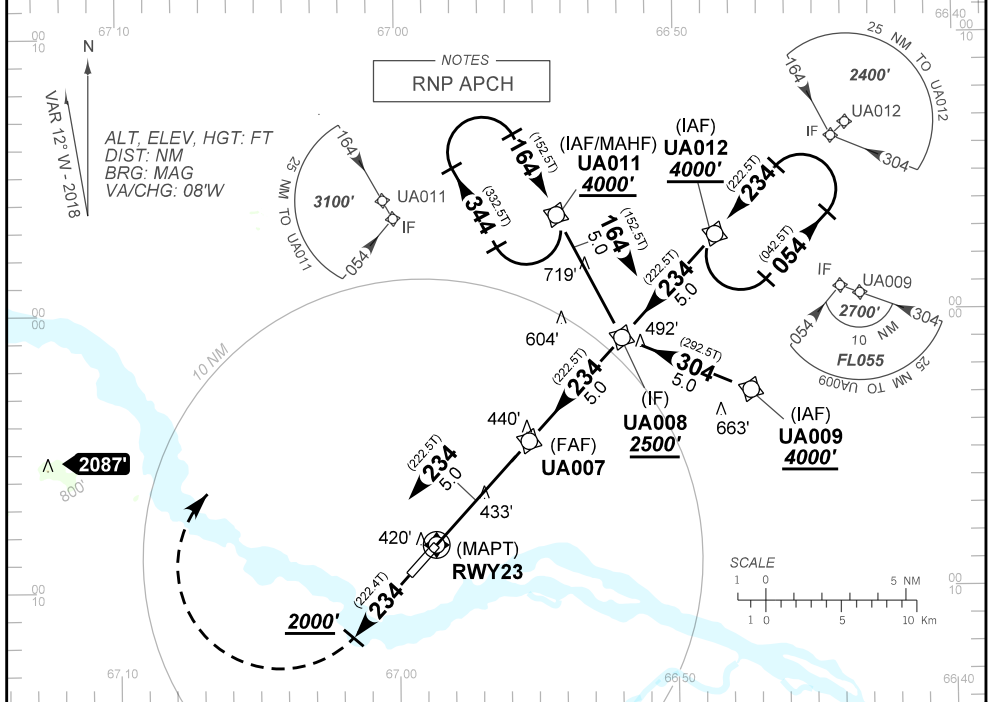

RWY23	1.2	2.2	3.0	4.0	UA007													
ALT	680	1000	1251	1570	1890													
(HGT)	434	754	1005	1324	1644													

STRAIGHT-IN	CAT	A	B	C	D	E
	DA / (OCH)	613' / (370')				
LNAV/VNAV	ALS/NO ALS/ RVR ALS (m)	NIL / 1700 / NIL				
	MDA / (OCH)	680' / (440')				
LNAV	ALS/NO ALS/RVR ALS (m)	NIL / 1700 / NIL			NIL / 2000 / NIL	
	MDA / (OCH)	NA				
CIRCLING	VIS (m)	NA				

CHANGES: NEW CHART.