

INSTRUMENT APPROACH
CHART (IAC)

NAVEGANTES / Ministro Victor Konder, INTL (SBNF)

AD ELEV: 18'



RNAV(GNSS) RWY 07

ATIS 127.625	APP FLORIANOPOLIS 119.50 119.65 128.95 129.45 129.60 121.50	TWR NAVEGANTES 118.20	GNDC NAVEGANTES NIL
N/A	FINAL CRS 075°	FAF: 1660'	LNAV/VNAV DA / (OCH): 531' / (520')
		LNAV MDA / (OCH): 620' / (600')	

APCH perdida: subir para **4000'**. Manter rumo **075°** até cruzar **2000'**. Então, curvar à DIREITA direto BUTMU para espera.

Missed APCH: Climb to **4000'**. Maintain course **075°** until passing **2000'**. Then, turn RIGHT direct to BUTMU for holding.

RMK: Para sistemas não compensados, LNAV/VNAV não autorizado abaixo de -10°C ou acima de 44°C.
For uncompensated systems, LNAV/VNAV procedure not authorized below -10°C or above 44°C.

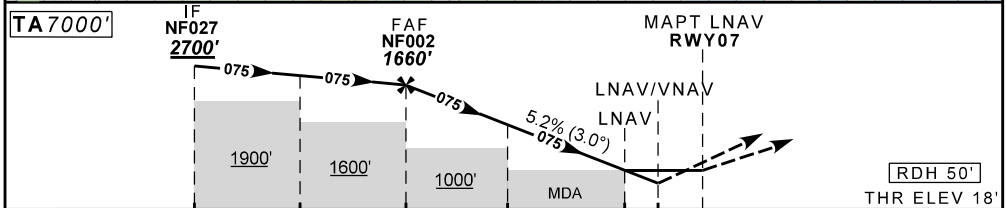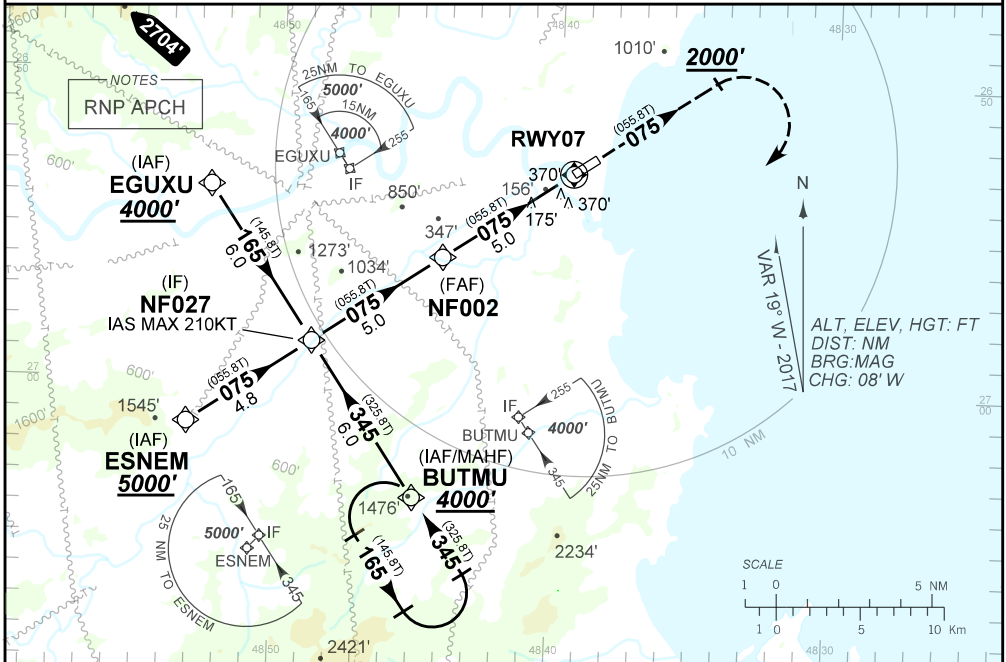

TO THR 07 (NM)	10.0	7.2	5.0	3.0	1.7	1.5	0.0												
NF002	4.0	3.0	2.0	1.7	RWY07	KT	090	110	130	150	170	190							
1660	1341	1023	704	620	ALT	FPM	500	600	700	800	900	1000							
1642	1323	1005	686	602	(HGT)	FAF-MAPT	NA												

STRAIGHT-IN	CAT	A	B	C	D	E
LNAV/VNAV	DA / (OCH)	531' / (520')				NA
	ALS/NO ALS/RVR ALS (m)	NIL / 2400 / NIL				
LNAV	MDA / (OCH)	620' / (600')				
	ALS/NO ALS/RVR ALS (m)	NIL / 2400 / NIL		NIL / 2700 / NIL		
CIRCLING	MDA / (OCH)	NA				
	VIS (m)					

CHANGES: PROC. TAA

AIRAC AMDT 12/19 18 JUL 19

DEPARTAMENTO DE CONTROLE DO ESPAÇO AÉREO

SBNF_IAC_001 1

IAC RNAV(GNSS) RWY 07