


AD ELEV: 56'

ARP S01 23 05 W048 28 44

D-ATIS 127.60	DCL	GNDC 121.90	TWR 118.70 121.50	APRON NIL
------------------	-----	----------------	----------------------	--------------

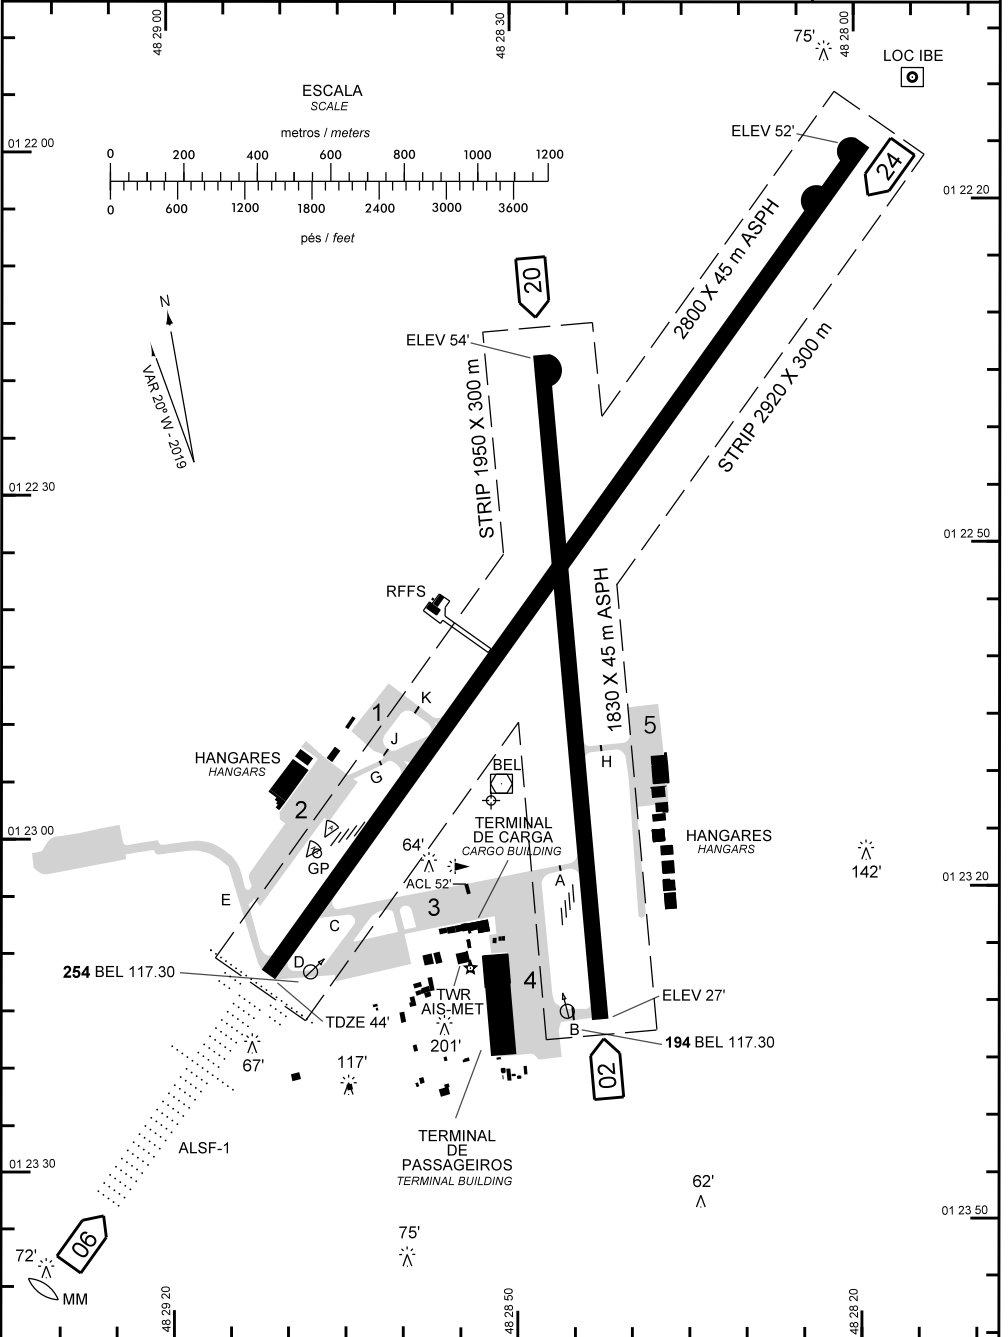

ADC - SBBE: INFORMAÇÕES COMPLEMENTARES / COMPLEMENTARY INFORMATION


CARACTERÍSTICAS FÍSICAS / PHYSICAL CHARACTERISTICS												
PISTA RUNWAY				DIMENSÕES(m) DIMENSIONS(m)					PCN		TIPO DE SUPERFÍCIE SURFACE KIND	
RWY	BRG MAG	Tipo Type	RCD	RWY	SWY	CWY	STRIP	RESA	RWY	RWY	SWY	
a	b	c	d	e	f	g	h	i	j	k	l	
06 24	065 245	PA-1 NPA	4E 4E	2800X45			2920 X 300		65/F/A/X/T	ASPH		
02 20	024 204	NPA NPA	4E 4E	1830X45			1950 X 300		50/F/A/X/T	ASPH		

DISTÂNCIAS DECLARADAS, AUXÍLIOS VISUAIS E COORDENADAS DAS CABECEIRAS DECLARED DISTANCES, VISUAL AIDS AND THRESHOLD COORDINATES								
RWY	TORA(m)	TODA(m)	ASDA(m)	LDA(m)	AUXÍLIOS / AIDS		ALTURA GEOIDAL(m) GEOID HEIGHT(m)	COORDENADAS COORDINATES
06 24	2710 2710	2800 2800	2710 2710	2710 2710	PAPI	ALSF-1	- 24,17 - 24,17	S01 23 17 W048 29 06 S01 22 13 W048 28 01
02 20	1740 1740	1830 1830	1740 1740	1740 1740	PAPI		- 24,17 - 24,17	S01 23 26 W048 28 38 S01 22 27 W048 28 33


SERVIÇO DE SALVAMENTO E CONTRAINCÊNDIO / RESCUE AND FIRE FIGHTING SERVICE: RFFS REQ - 7

RWY 06 / 24

Sinalização horizontal / Marking Aids




Auxílios luminosos / Lighting Aids




RWY 02 / 20

Sinalização horizontal / Marking Aids



Auxílios luminosos / Lighting Aids



- RMK:**
- MEHT: PAPI - RWY 03: 44'
RWY 06: 66'
 - ATIS - D-ATIS (DATA LINK ATIS) AUTH DE VIA DATALINK ACT H24.
 - RWY 06 E RWY 24 ÚLTIMOS 90M CLSD PARA LDG/TKOF DEVIDO PROVIMENTO DE RESA.
RWY 06 AND RWY 24 LAST 90M CLSD LDG/TKOF DUE PROVISION OF RESA.
 - RWY 02 E RWY 20 ÚLTIMOS 90M CLSD PARA LDG/TKOF DEVIDO PROVIMENTO DE RESA.
RWY 02 AND RWY 20 LAST 90M CLSD LDG/TKOF DUE PROVISION OF RESA.
 - OBST (TORRE) LGTD COORD 012555,38S/0482718,80W ELEV 439FT MONTADO.
OBST (TOWER) LGTD COORD 012555,38S/0482718,80W ELEV 439FT MOUNTED.

CHANGES: BRG MAG, THR, TDZE, DIST DECLARADAS