


AD ELEV: 34'

ARP: S20 15 29 W040 17 11

ATIS 127.575	CLRD NIL	GNDC 121.95	TWR 118.10 121.50	APRON NIL
-----------------	-------------	----------------	----------------------	--------------

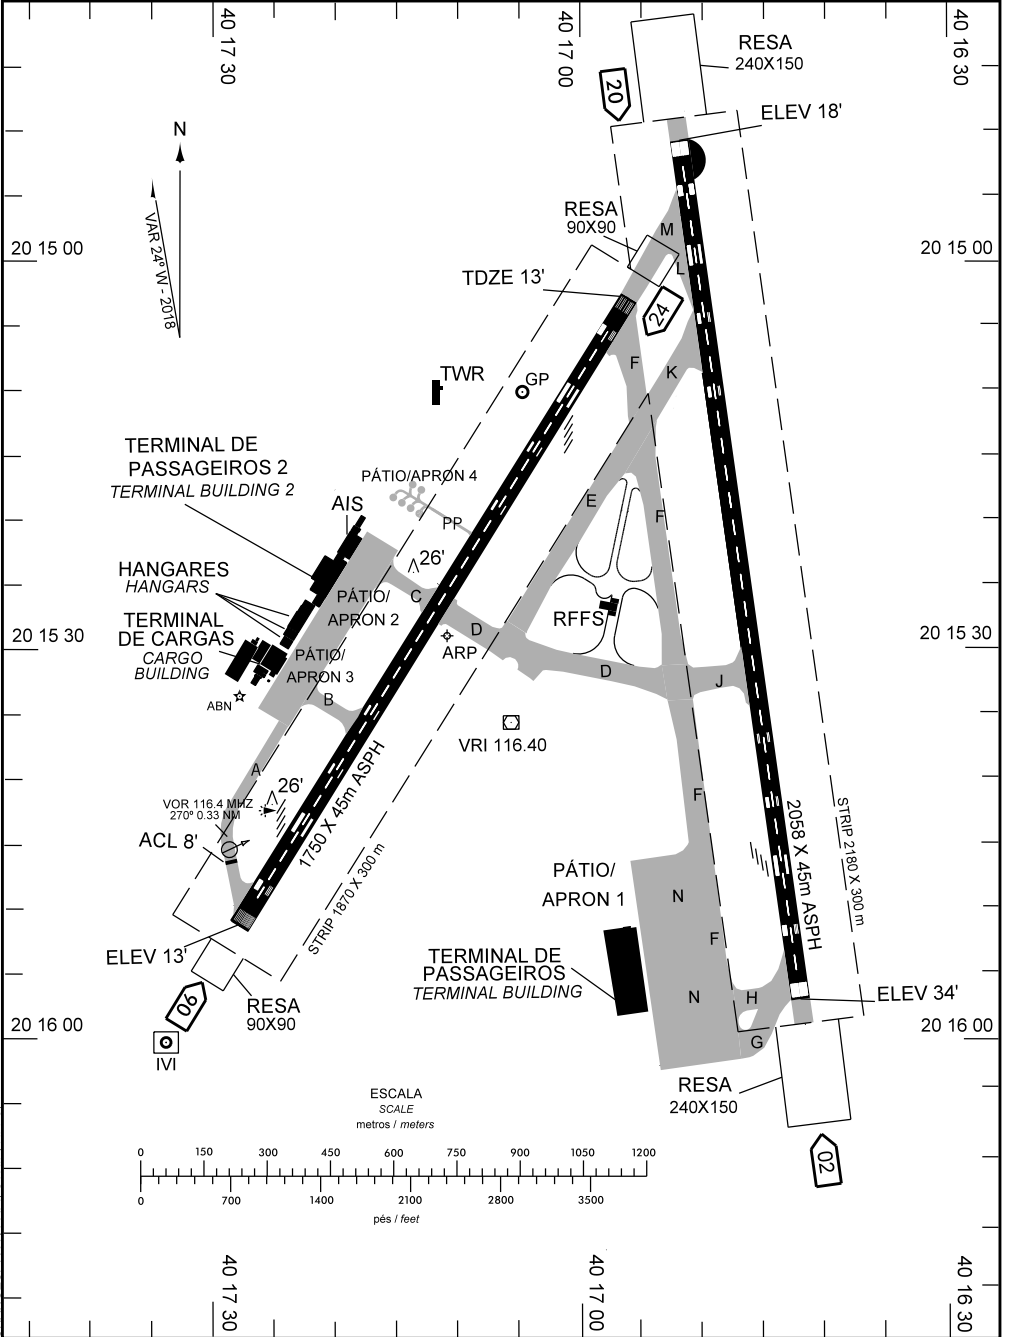



CHANGES: TWR, PAPI, STRIP, REFS, TWR

ADC - SBVT: INFORMAÇÕES COMPLEMENTARES / COMPLEMENTARY INFORMATION

CARACTERÍSTICAS FÍSICAS / PHYSICAL CHARACTERISTICS												
PISTA RUNWAY				DIMENSÕES(m) DIMENSIONS(m)					PCN	TIPO DE SUPERFÍCIE SURFACE KIND		
RWY	BRG MAG	Tipo Type	RCD	RWY	SWY	CWY	STRIP	RESA	RWY	RWY	SWY	
a	b	c	d	e	f	g	h	i	j	k	l	
06	055	NPA	3	1750 X 45			1870 X 300	90X90	45/F/B/X/T	ASPH		
24	235	PA-1	3					90X90				
02	016	NPA	4D	2058 X 45			2180 X 300	240 X150	86/F/B/X/T	ASPH		
20	196	NPA	4D					240 X150				

DISTÂNCIAS DECLARADAS, AUXÍLIOS VISUAIS E COORDENADAS DAS CABECEIRAS DECLARED DISTANCES, VISUAL AIDS AND THRESHOLD COORDINATES								
RWY	TORA(m)	TODA(m)	ASDA(m)	LDA(m)	AUXÍLIOS / AIDS		ALTURA GEOIDAL(m) GEOID HEIGHT(m)	COORDENADAS COORDINATES
06	1750	1750	1750	1750	PAPI		- 6,11	S20° 15' 52" W040° 17' 28"
24	1750	1750	1750	1750	PAPI		- 6,12	S20° 15' 03" W040° 16' 56"
02	2058	2058	2058	2058	PAPI		- 6,15	S20° 15' 57" W040° 16' 42"
20	2058	2058	2058	2058			- 6,15	S20° 14' 51" W040° 16' 52"

SERVIÇO DE SALVAMENTO E CONTRAINCÊNDIO / RESCUE AND FIRE FIGHTING SERVICE: RFFS REQ - 7

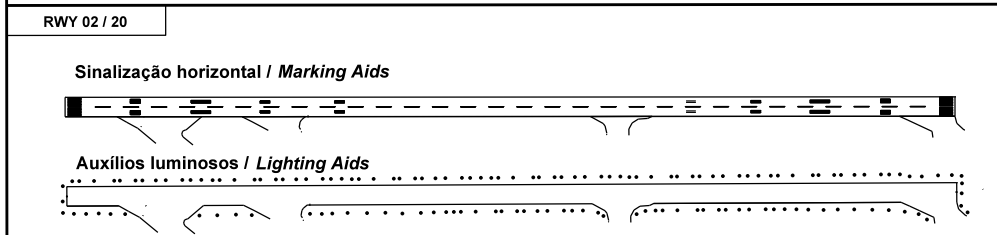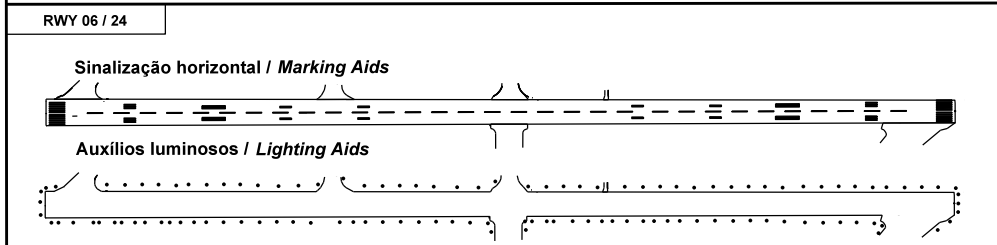

RMK:

1 - MEHT: RWY 24 - 45FT
RWY 02 - 54FT

2- MAIOR ACFT A OPERAR NAS TWY D, E, F, G, H, J, K, L, M: B767-200.
MAXMUM WINGSPAN TWY D, E, F, G, H, J, K, L, M: B767-200.

CHANGES: TWY, PAPI, STRIP, REFS, TWR